



HDBaseT 1 Gang Wall Plate for HDMI with POL

**EAWP-70-T
Transmitter
&
EAWP-70-R
Receiver**



User Manual

Contents

Introduction	2
Package Contents.....	2
Features.....	2
Panel Descriptions	
EAWP-70-T.....	3
EAWP-70-R.....	4
Connection and Installation	5
Specification.....	5
Safety Information.....	6
Warranty	6
Return and RMA Policies	6

Introduction

The EAWP-70-T & EAWP-70-R are part of VitBest's expanding Multi Video HDBaseT Cat wall plate. It provide a cleaner wiring solution for HDMI, IR and Power transmission. The design allows the system to be powered via a DC adapter from either side! With a single CAT 5e/6/7 cable, the EAWP-70-T/R can go up to 230ft, 1080p@60Hz 48bit color depth and also support 4K, PoL.

Package Contents – EAWP-70-T

- 1×EAWP-70-T

Package Contents – EAWP-70-R

- 1×EAWP-70-R


Features

- Transmit HDMI up to 1080p@60Hz 48bit 230ft over one Cat 5e/6/7 cable;
- Support HDMI 4K x 2K and 3D;
- HDCP Compliant;
- Power both units from TX or RX side with wall power supply(POL);
- Status LED for all connections on front;
- European standard.

Panel Description


EAWP-70-T

a. Front Panel

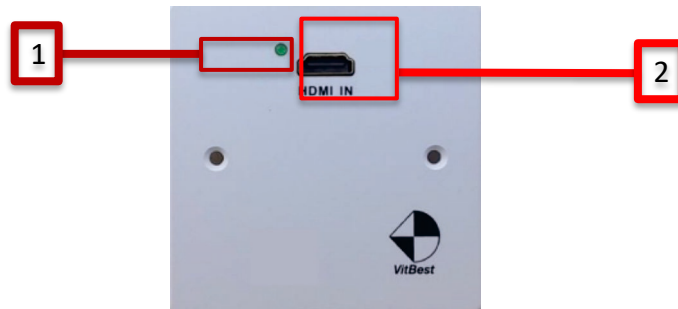

1. **Link:** Blinking when HDBT connect without video signal, stable on when video active;
2. **HDMI In:** Connect to HDMI source;


b. Rear Panel

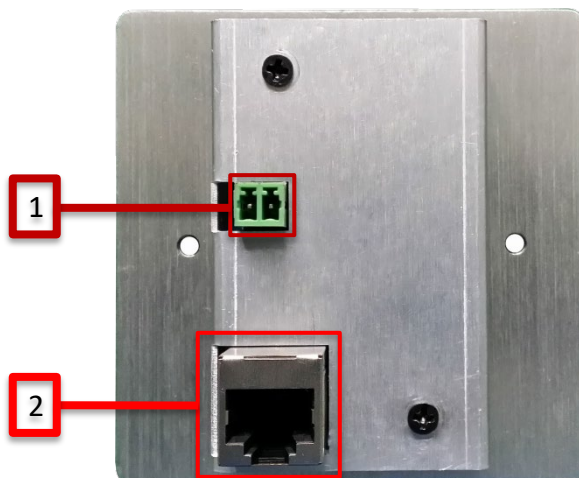

1. **Power:** Connect to DC adapter here to power up device;
2. **HDBaseT:** Connect Cat from here to a compatible receiver.


EAWP-70-R

a. Front Panel

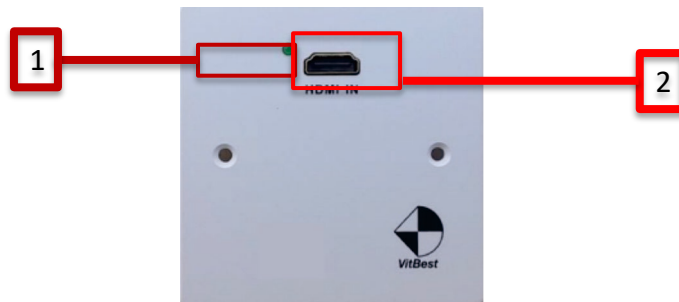


1. **Link:** Blinking when HDBT connect without video signal, stable on when video active;
2. **HDMI Out:** Connect to display;

b. Rear Panel

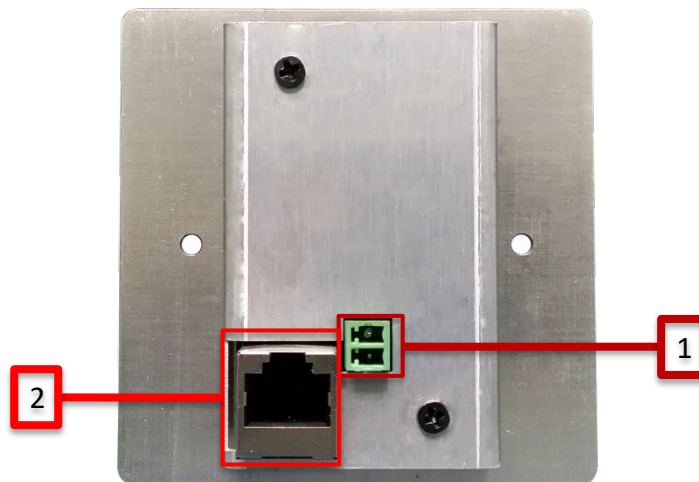

1. **Power:** Connect to DC adapter here to power up device;
2. **HDBaseT:** Connect HDBaseT source here.

Connection and Installation

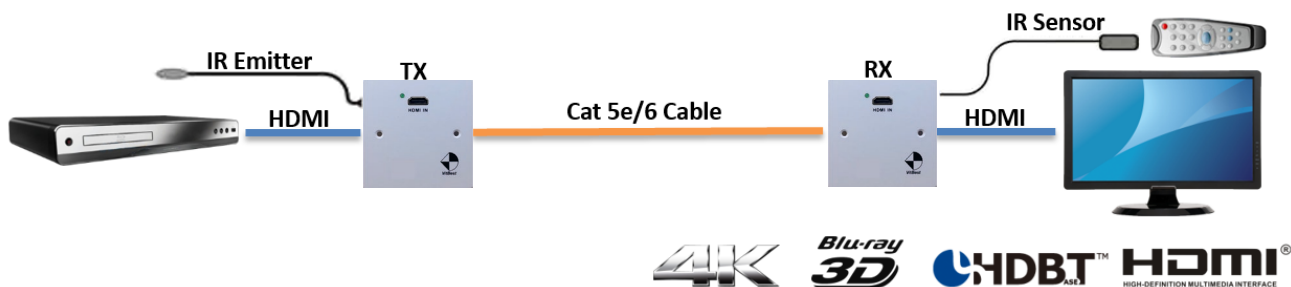

Specification

Video	
HDMI Compliance	HDMI 3D, 4K
HDCP Compliant	Yes
Distance	230ft [70m] on 1080p@60Hz
Max Resolution	4K*2K
Connectors	
TX Connectors	(1) HDMI, (1)Rj45(HDBT),(1)IR,
RX Connectors	(1) HDMI, (1)Rj45(HDBT),(1)IR,
Mechanical	
Dimensions	European:86*86mm
Net Weight	0.49lbs[220g]
Package Size	240 x 180 x 70 mm(L/W/H)
Gross Weight	0.97lbs[440g]
Power	
Power Supply	24V 1A DC
Environmental	
Operation Temperature	32~131°F [0~55°C]
Storage Temperature	-4~185°F [-20~85°C]
Relative Humidity	5~95% RH [no condensation]

Safety Information



To reduce the risk of electric shock, do not expose this product to rain or moisture



Do not modify the wall plug. Doing so will void the warranty and safety features



If the wall plug does not fit into your local power socket, hire an electrician to replace your obsolete socket.



This equipment should be installed near the socket outlet and the device should be easily accessible in the case it requires disconnection

Warranty

Warranty time is One year and from the date of original shipment. This warranty shall be void if a serial number has been removed from the product.

Upon determination of a legitimate defect covered by this warranty and at VitBest's sole discretion, user should bear the transport cost